
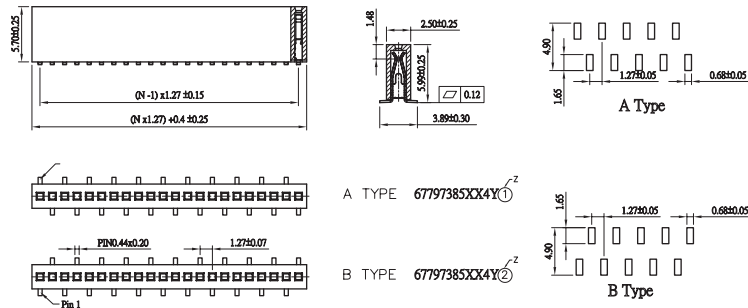


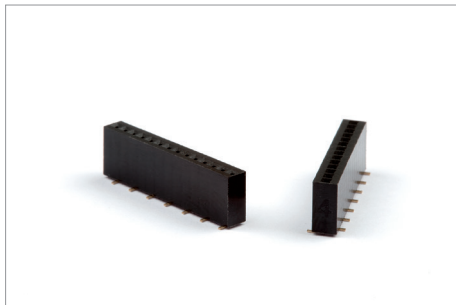

Features	Socket Body height 6.0 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 500 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E	F	G
677	9738	5	xx	4x	x	- x

D	Number of contacts from 03 to 30	G	T: tube TC: Tube + Cap R: Tape & Reel RC: Tape & Reel + Cap
E	Plating 1 Gold flash 0 Gold 4 Tin 7 Selective gold 6 Selective gold flash		
F	Position of the first pin (see below 1 or 2)		