



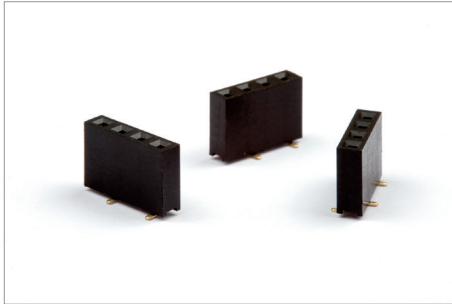

(N= Number
of contacts)

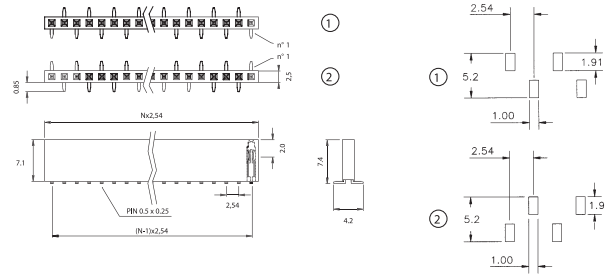

Features	Body height 7.1 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube, box or T&R

Product Code

A	B	C	D	E	F
677	9753	1xx	4x	x	-x

C	Number of contacts from 03 to 40
D	Plating 1 Gold flash 4 Tin 7 Selective gold
E	Position of the first pin see below 1 or 2

F
T: tube
TC: Tube + Cap
R: Tape & Reel
RC: Tape & Reel + Cap