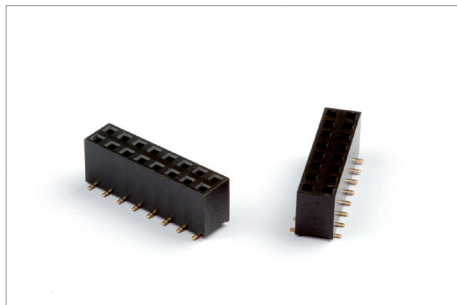


Features	Dual entry socket Body height 7.1 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube, box or T&R

Product Code

A	B	C	D	E	F
677	9754	1xx	4x	x	-x

C	Number of contacts from 03 to 40	F	T: tube TC: Tube + Cap R: Tape & Reel RC: Tape & Reel + Cap
D	Plating 1 Gold flash 4 Tin 7 Selective gold		
E	Alignment pin 0 without 1 with		