
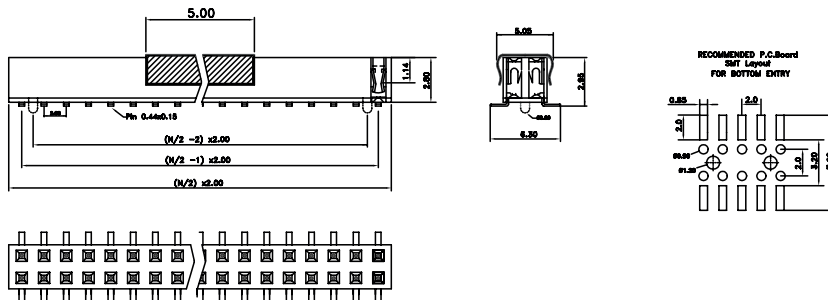


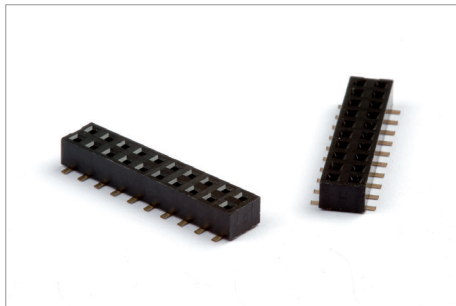

Features	Dual entry socket Body height 2.8 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Phosphor bronze
Electrical	Current rating: 1A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C

Product Code

A	B	C	D	E	F	G
677	9784	6	xx	4x	x	-x

D	Number of contacts from 10 to 60
E	Plating 0 Gold 1 Gold flash 4 Tin 7 Selective gold
F	Locating peg 0 without 1 with

G

T: tube
TC: Tube + Cap
R: Tape & Reel
RC: Tape & Reel + Cap