
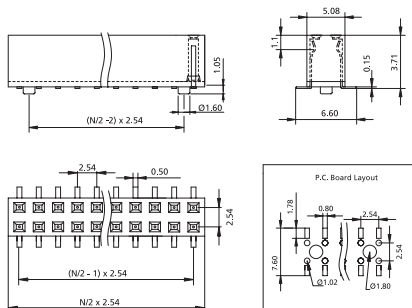


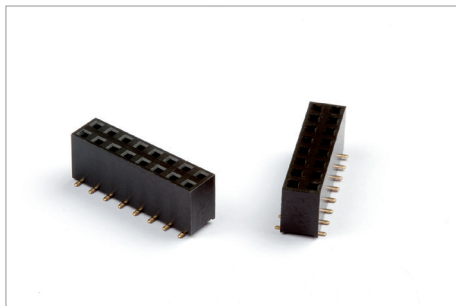

Features	Dual entry socket Body height 3.7 mm
Material	Insulator Material: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 3A maxi Dielectric withstanding: 1000 V AC Insulation resistance: 1000 MΩ mini
Packaging	Tube, box or T&R

Product Code

A	B	C	D	E	F
677	9797	1xx	4x	x	-x

C	Number of contacts from 04 to 80
D	Plating 0 Gold 0.25 µm 1 Gold flash 4 Tin 7 Selective gold
E	Locating peg 0 without 1 with Only selective gold plating available

F

T: tube
TC: Tube + Cap
R: Tape & Reel
RC: Tape & Reel + Cap