
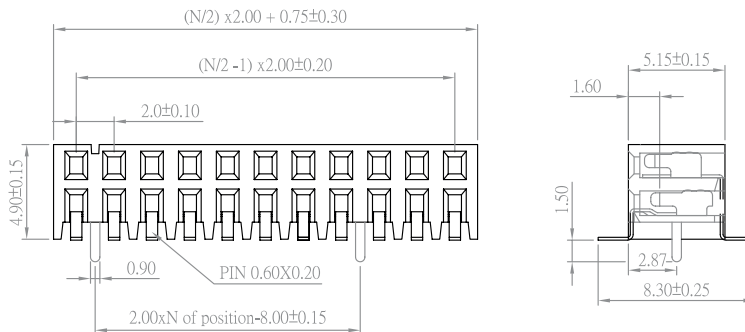


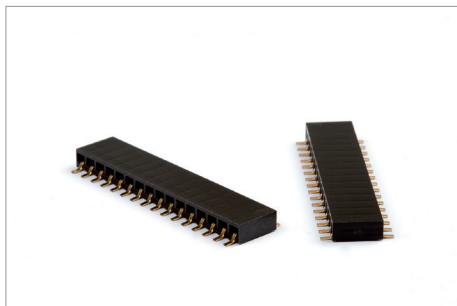

Features	Body height 4.9 mm
Material	Insulator: High temperature thermoplastic UL 94V0 Contact: Copper alloy
Electrical	Current rating: 1.5A maxi Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩmini Contact resistance: 20 mΩ max
Mechanical	Temperature rating: -40 °C to 105 °C
Packaging	Tube or Tape & Reel

Product Code

A	B	C	D	E	F
677	9841	6xx	4x	x	-x

C	Number of contacts from 04 to 40	F	T: tube TC: Tube + Cap RC: Tape & Reel + Cap
D	Plating 1 Gold flash 4 Tin 7 Selective gold		
E	Location peg 0: without location peg 1: with location peg		