




(N= Number of contacts)

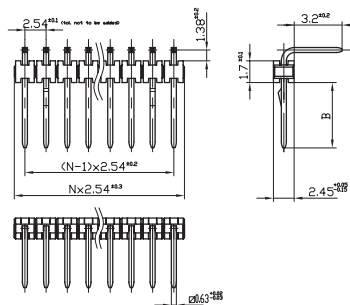

Features	Breakable header
	Insulator profile 1.7 mm
	Pin side dimension 0.63 mm
Material	Insulator:
	High temperature thermoplastic UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 3A maxi
	Dielectric withstanding: 500 V AC
	Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 125 °C
Packaging	Cardboard boxes

Product Code

A	B	C	D
903	99xx	1xx	4x0

B	Standard connectors: view table
C	Number of contacts from 01 to 40
D	Plating
	0 Gold 0.20÷0.25 µm over 1÷2 µm Ni
	1 Gold flash
	4 Tin 3÷5 µm over 0.5÷1 µm Ni

Version	A	B	C
11	2.3	3.2	1.38
13	3.3	3.2	1.38
15	4.3	3.2	1.38
17	5.5	3.2	1.38
19	6.9	3.2	1.38
21	7.6	3.2	1.38
22	8.2	3.2	1.38
24	9.1	3.2	1.38
28	10.8	3.2	1.38
31	12.6	3.2	1.38
32	13.4	3.2	1.38
33	15.1	3.2	1.38