


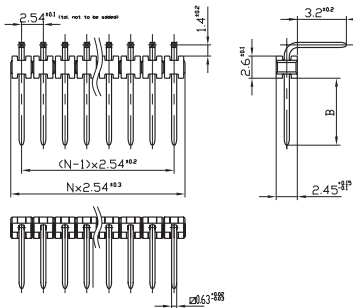

Features	Breakable header
	Insulator profile 2.6 mm Pin side dimension 0.63 mm
Material	Insulator: High temperature thermoplastic UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 3A maxi
	Dielectric withstanding: 500 V AC Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 125 °C
Packaging	Cardboard boxes

Product Code

A	B	C	D
972	99xx	1xx	4x0

B	Standard connectors: view table
D	Number of contacts from 01 to 40
E	Plating
	0 Gold 0.20÷0.25 µm over 1÷2 µm Ni
	1 Gold flash
	4 Tin 3÷5 µm over 0.5÷1 µm Ni

xx	B	C	D
15	3.4	3.2	1.4
17	4.6	3.2	1.4
19	6.0	3.2	1.4
21	6.7	3.2	1.4
22	7.3	3.2	1.4
24	8.2	3.2	1.4
28	9.9	3.2	1.4
31	11.7	3.2	1.4
33	14.2	3.2	1.4
35	15.5	3.2	1.4
37	18.0	3.2	1.4
39	20.5	3.2	1.4
42	23.0	3.2	1.4