



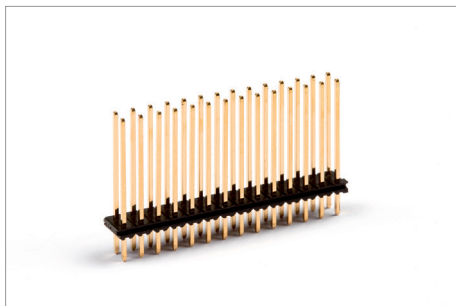

(N= Number
of contacts)

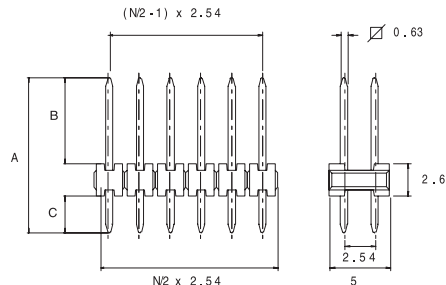

Features	Breakable header
	Insulator profile 2.6 mm
	Pin side dimension 0.63 mm
Material	Insulator:
	High temperature thermoplastic
	UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 3A maxi
	Dielectric withstanding: 500 V AC
	Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 125 °C
Packaging	Cardboard boxes

Product Code

A	B	C	D
973	99xx	1xx	4x0

B	Standard connectors: view table
C	Number of contacts from 02 to 80
D	Plating
	0 Gold 0.20÷0.25 µm over 1÷2 µm Ni
	1 Gold flash
	4 Tin 3÷5 µm over 0.5÷1 µm Ni

xx	A	B	C
11	9.2	3.4	3.2
13	10.2	4.4	3.2
15	11.2	5.4	3.2
17	12.4	6.6	3.2
19	13.8	8.0	3.2
21	14.5	8.7	3.2
22	14.5	8.7	3.2
24	16.0	10.2	3.2
28	17.7	11.9	3.2
31	19.5	13.7	3.2
33	22.0	16.2	3.2
35	23.3	17.5	3.2
37	25.8	20.0	3.2
39	28.3	22.5	3.2
42	30.8	25.0	3.2