


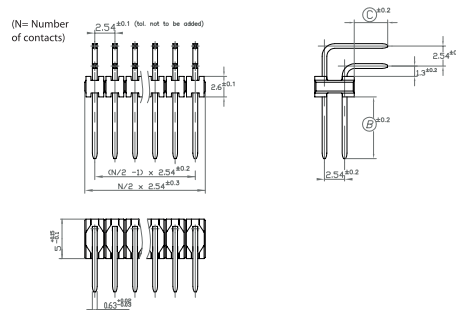

Features	Breakable header
	Insulator profile 2.6 mm
	Pin side dimension 0.63 mm
Material	Insulator:
	High temperature thermoplastic UL 94V0
	Contact: Phosphor bronze
Electrical	Current rating: 3A maxi
	Dielectric withstanding: 500 V AC
	Insulation resistance: 1000 MΩ mini
Mechanical	Temperature rating:
	-40 °C to 125 °C
Packaging	Cardboard boxes

Product Code

A	B	C	D
974	99xx	1xx	4x0

B	Standard connectors: view table
C	Number of contacts from 02 to 80
D	Plating
	0 Gold 0.20÷0.25 μm over 1÷2 μm Ni
	1 Gold flash
	4 Tin 3÷5 μm over 0.5÷1 μm Ni

Version	B	C
51	2.3	3.2
52	6.6	3.2
53	4.5	3.2
54	7.2	3.2
67	11.5	3.2
74	15.4	3.2
79	17.9	3.2