




WIRE TO BOARD FAST - ON

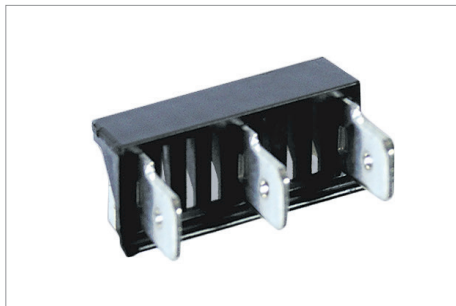

Version Q



Version S



Features	Fast - on header 10.16 mm pitch UL file number E150931
Material	Insulator: PC UL94V0 Contact: FeP02 Plating Ni+Sn
Electrical	Voltage 500 V Current rating depending on contact shape C 2.8=6A 5=10 A 6.3=16 A 2863=16 A max depending on cable side
Mechanical	Temperature rating: -30 °C to 85 °C

Product Code

A	B	C	D
CQx	/Cx	/x	NE

A

Version:
S Straight
Q Right angle

B

Number of contacts from 02 to 09

C

Terminal shape (see drawing)