


WIRE TO BOARD FAST - ON

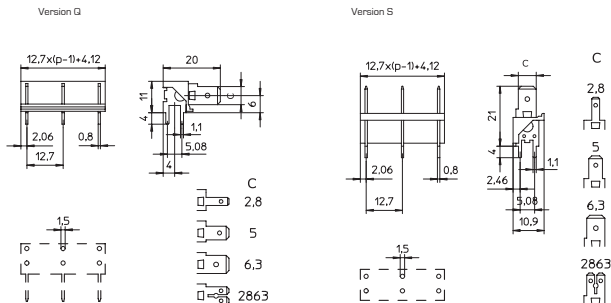

Features	Fast - on header 12.7 mm pitch UL file number E150931
Material	Insulator: PC UL94V0 Contact: FeP02 Plating Ni+Sn
Electrical	Voltage 630 V Current rating depending on contact shape C 2.8=6A 5=10 A 6.3=16 A 2863=16 A max depending on cable side
Mechanical	Temperature rating: -30 °C to 85 °C

Product Code

A	B	C	D
CQx	/Dx	/x	NE

A	Version: S Straight Q Right angle
B	Number of contacts from 02 to 07
C	Terminal shape (see drawing)