

TERMINAL BLOCKS FOR P.C.B.
RISING CLAMP

MORSETTI PER C.S.
CARRELLO

BLOCS DE JONCTION C.I.
ÉTRIER REMONTANT


PRINTKLEMMEN
LIFTPRINZIP

CPA CPA..SQ*

Single block · Blocco unico
Monobloc · Einzelblock

Poles · Poli · Pôles · Polzahl

2/24

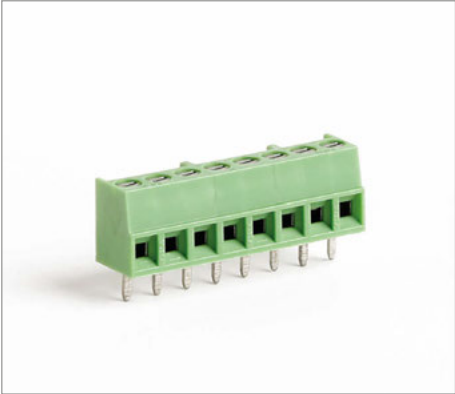

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tension nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158


Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
CPA	3,5	/ X	SQ	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

3,5 - 3,81		
160		
10		
0,2 ÷ 1,5 30 ÷ 16	0,2 ÷ 1,5 30 ÷ 16	0,2 ÷ 1,5 30 ÷ 16
6		
0,3	/	2,5
110		
PA - UL 94 V0		
M2		
	0,5 x 2,5	

V	A	mm²/AWG
130	10	0,2 ÷ 1
130	10	0,2 ÷ 1,5 P*
300	10	30 ÷ 16

min 2 - max 24		
VE	/ on demand	GR GR1 NE AR BL RO GI

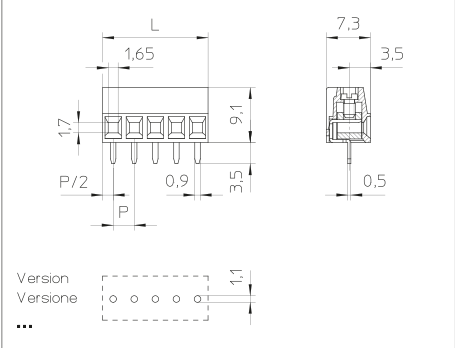

Version Versione	<table><tr><td>P</td><td>L (mm)</td></tr><tr><td>3,5</td><td>3,5 x p</td></tr><tr><td>3,81</td><td>3,81 x p</td></tr></table>	P	L (mm)	3,5	3,5 x p	3,81	3,81 x p
P	L (mm)						
3,5	3,5 x p						
3,81	3,81 x p						
SQ*							

*P = Pending

*SQ Version = Horizontal version