

TERMINAL BLOCKS FOR P.C.B.
 RISING CLAMP

MORSETTI PER C.S.
 CARRELLO

BLOCS DE JONCTION C.I.
 ÉTRIER REMONTANT

PRINTKLEMMEN
 LIFTPRINZIP

Pitch Pas	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensité nominale	Corrente nominale Bemessungsstrom	A

Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm² AWG
Stripping lenght Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis Imperdable	Vite Imperdibile Unverlierbare Schraube	
		mm

	IMQ	EN60998
	VDE	EN60998
	cUL	UL1059 + C22.2 n°158

Poles Pôles	Poli Polzahl	X
Colours Couleurs	Colori Farben	Y

How to order Référence de commande		Ordinazione Bestellschlüssel			
MRT5	P5	/X	SQ	Y	N...
Type	Pitch	Poles	Version	Colors	Printing
Tipo	Passo	Poli	Versione	Colori	Numerazione
Type	Pas	Pôles	Version	Couleurs	Marquage
Typ	Rastermaß	Polzahl	Version	Farben	Bedruckung

MRT5
 MRT5..SQ*

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2





10 - 10,16
630
20

		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	20	0,5 ÷ 2,5
300	16	30 ÷ 12

min 2 - max...
VE / on demand GR GR1 NE AR BL RO GI

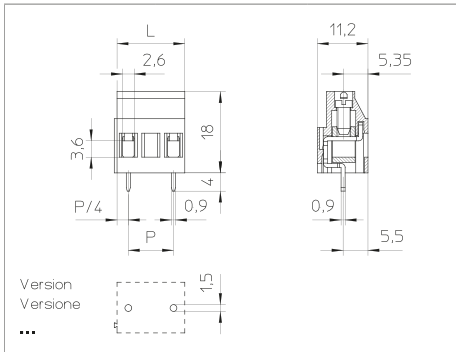

Version Versione		
SQ*	P	L (mm)
	10	(10 x p)-5
	10,16	(10,16 x p)-5,08

MRT5..DP

Interlocking modules · Modulo componibile
 Elements modulaires · Zusammensteckbare Blöcke

Poles · Poli · Pôles · Polzahl

1/2




10 - 10,16
630
20

		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	5
110		
PA - UL 94 V0		
M3		
	0,6 x 3,5	

V	A	mm²/AWG
750	24	0,5 ÷ 2,5
750	20	0,5 ÷ 2,5
300	16	30 ÷ 12

min 2 - max...
VE / on demand GR GR1 NE AR BL RO GI

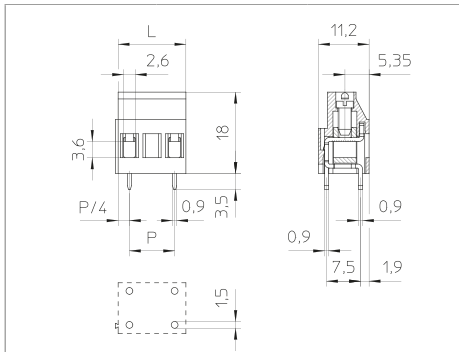

Version Versione		
DP	P	L (mm)
	10	(10 x p)-5
	10,16	(10,16 x p)-5,08

*SQ Version = Horizontal version